


NOTE:

1. DIMENSIONS ACCOMMODATE ANSI Z245.60-2008 TYPE B CONTAINERS (DOMESTIC 2-BAR CARTS), BUT MAY VARY DUE TO CONTAINER SPECIFICATIONS OR APPLICATIONS.
2. ALL DIMENSIONS ARE APPROXIMATE.
3. UNITS MARKED WITH ** HAVE A SLOW DOWN ACTUATOR.
4. FOR BOLT-ON APPLICATIONS USE MOUNTING PLATE KIT 2000-1112.
5. PART NUMBERS: SEE CHART

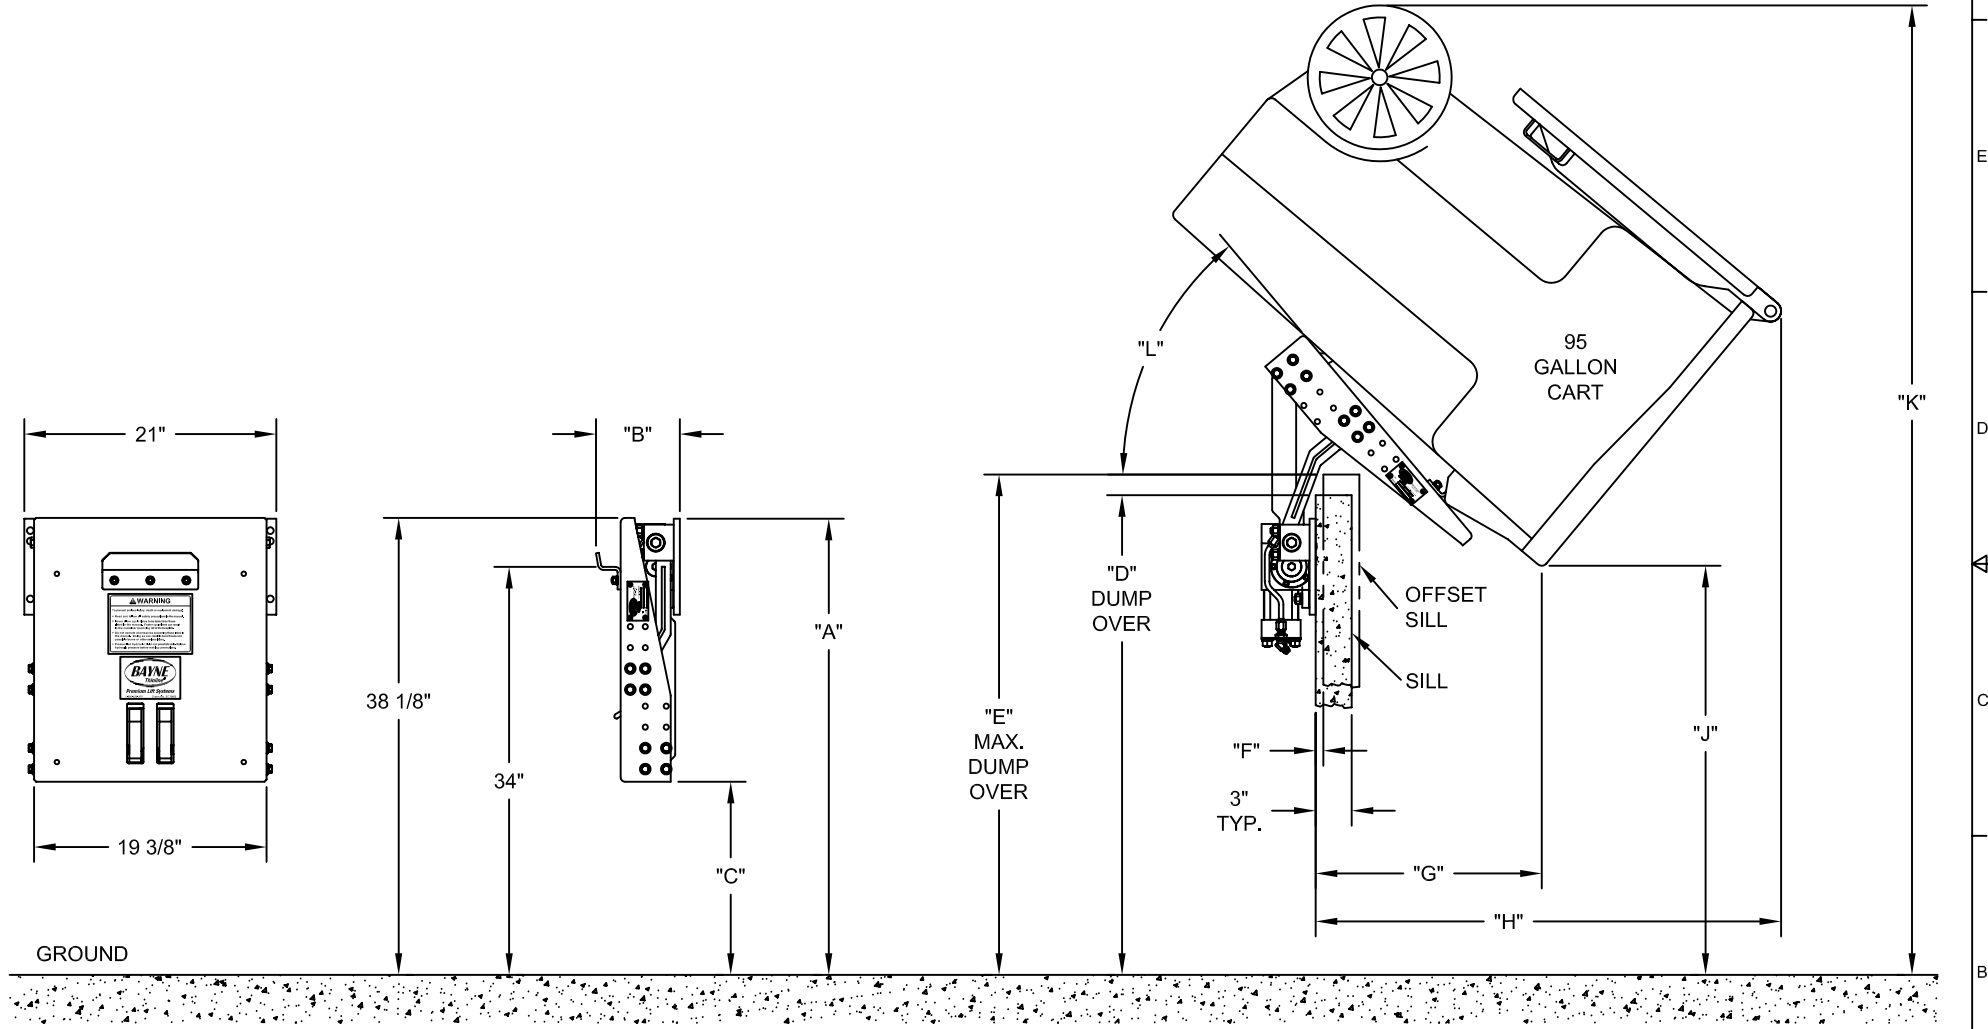

CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES LINEAR TOLERANCES: FRACTIONAL ±1/32 TWO PLACE DECIMAL ±.015 THREE PLACE DECIMAL ±.005 ANGULAR TOLERANCES: MACHINED ±0.25 DEG BEND ±1.00 DEG		BAYNE MACHINE WORKS, INC.			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BAYNE MACHINE WORKS, INC. AND IS RECALLABLE AT ANY TIME. IT MUST NOT BE COPIED OR USED DETRIMENTALLY TO THE INTEREST OF BAYNE MACHINE WORKS, INC.				910 FORK SHOALS ROAD - GREENVILLE, SC 29605 - 864.288.3877			
TITLE						TL SERIES SPECIFICATIONS	
MATERIAL		DRAWN BY	DATE	SCALE	SHEET	OF	
		CTT	10/22/2009	NONE	1	4	
QTY	FINISH	WEIGHT	CHECKED BY	DATE	DWG NO	REV	
					H3000027	-	

MODEL NUMBER	PART #	"A" DIM.	"B" DIM.	"C" DIM.	"D" DIM.	"E" DIM.	"F" DIM.	"G" DIM.	"H" DIM.	"J" DIM.	"K" DIM.	"L" DIM.
TL 1116	1900-0017	38"	7"	16 1/8"	40"	41 3/4"	5/8"	18 7/8"	38 3/4"	34 1/8"	80 3/4"	50°
TL 1116 F.L.B.	1900-3017											
TL 1116 (TOP HOLES)	1900-0250	41 1/2"	7"	16 1/8"	43 1/2"	45 3/4"	1"	16 5/8"	36 1/2"	40 1/4"	87"	50°
TL 2216 (TOP HOLES) **	1900-0228											
TL 1116-2524	1900-0033	38 3/8"	12 1/2"	16 1/4"	40 7/8"	43 1/8"	1 7/8"	21 1/8"	43 1/8"	32 3/8"	80 1/4"	56°
TL 2216-2524 **	1900-0237											
TL 1116-2524 (TOP HOLES)	1900-0170	41 7/8"	12 1/8"	16 1/4"	44 3/8"	46 3/4"	2 1/8"	19 1/8"	41 1/8"	38 3/4"	86 5/8"	56°
TL 2216-2524 (TOP HOLES) **	1900-0171											
TL 1116-2526	1900-0120	38"	13"	16 1/8"	40 1/4"	42 7/8"	2 1/4"	20 3/4"	44 7/8"	29 5/8"	78 3/8"	63°
TL 2216-2526 **	1900-0190											
TL 1116-2526 (TOP HOLES)	1900-0172	41 1/2"	13"	16 1/8"	43 3/4"	46 3/8"	2 1/4"	19 1/8"	43 3/8"	36 1/4"	85"	63°
TL 2216-2526 (TOP HOLES) **	1900-0173											
TL 1120	1900-0019	42"	7"	16 1/8"	45 3/8"	49 3/4"	1 1/4"	19 5/8"	38 1/2"	43 1/4"	89 1/8"	47°
TL 1120 F.L.B.	1900-3019											
TL 2220 **	1900-0023											
TL 1120 (TOP HOLES)	1900-0252	45 1/2"	7"	16 1/8"	48 7/8"	53 7/8"	1 1/2"	17 1/4"	36 1/8"	49 1/4"	95 1/4"	47°
TL 2220 (TOP HOLES) **	1900-0257											
TL 1120 (1/4" OFFSET IDLER)	1900-0166	42 3/8"	8 1/2"	16 1/4"	45 3/4"	49 3/4"	1 1/8"	19 1/8"	38 3/4"	42 7/8"	89 1/4"	49°
TL 1120-2524	1900-0119	42 3/8"	12 1/2"	16 1/4"	46 1/8"	51 1/8"	2 5/8"	22 1/4"	43"	41 3/4"	88 7/8"	52°
TL 2220-2524 **	1900-0138											
TL 1120-2524 (TOP HOLES)	1900-0167	45 7/8"	12 1/8"	16 1/4"	49 5/8"	54 7/8"	2 7/8"	20 1/8"	40 3/4"	48"	95 1/8"	52°
TL 2220-2524 (TOP HOLES) **	1900-0168											
TL 1120-2526	1900-0035	42 1/8"	13 3/8"	16 1/8"	45 1/2"	51"	3"	22 5/8"	45 1/8"	39 1/2"	87 5/8"	58°
TL 2220-2526 **	1900-0039											
TL 1120-2526 (TOP HOLES)	1900-0169	45 5/8"	13 1/4"	16 1/8"	49"	54 5/8"	3"	20 3/4"	43 1/4"	46"	94 1/8"	58°
TL 2220-2526 (TOP HOLES) **	1900-0174											

CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BAYNE MACHINE WORKS, INC. AND IS RECALLABLE AT ANY TIME. IT MUST NOT BE COPIED OR USED DETRIMENTALLY TO THE INTEREST OF BAYNE MACHINE WORKS, INC.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
 LINEAR TOLERANCES:
 FRACTIONAL ±1/32
 TWO PLACE DECIMAL ±.015
 THREE PLACE DECIMAL ±.005
 ANGULAR TOLERANCES:
 MACHINED ±0.25 DEG
 BEND ±1.00 DEG

BAYNE MACHINE WORKS, INC.
 910 FORK SHOALS ROAD - GREENVILLE, SC 29605 - 864.288.3877

TITLE
TL SERIES SPECIFICATIONS

MATERIAL		DRAWN BY	DATE	SCALE	SHEET	OF
		CTT	10/22/2009	NONE	2	4
QTY	FINISH	WEIGHT	CHECKED BY	DATE	DWG NO	REV
					H3000027	-

MODEL NUMBER	PART #	"A" DIM.	"B" DIM.	"C" DIM.	"D" DIM.	"E" DIM.	"F" DIM.	"G" DIM.	"H" DIM.	"J" DIM.	"K" DIM.	"L" DIM.
TL 1124	1900-0021	46"	7"	16 1/8"	50 1/8"	57 5/8"	1 5/8"	20"	38 1/4"	51 7/8"	97 3/8"	45°
TL 1124 **	1901-0021											
TL 1124 (.059" ORIFICE)	1900-0232											
TL 1124 (3/8" KEY)	1900-0176											
TL 1124 (3/8" KEY) (.059" ORIFICE)	1900-0276											
TL 2224 **	1900-0025											
TL 1124 (TOP HOLES)	1900-0177	49 1/2"	7"	16 1/8"	53 5/8"	61 3/4"	1 7/8"	17 5/8"	35 3/4"	57 7/8"	103 1/4"	45°
TL 1124 (TOP HOLES) **	1900-0254											
TL 1124 (TOP HOLES) (3/8" KEY)	1900-0221											
TL 2224 (TOP HOLES) **	1900-0259											
TL 1124 (1/4" OFFSET IDLER)	1900-0236	46 1/2"	8 1/2"	16 1/4"	50 1/2"	57 5/8"	1 1/2"	19 1/2"	38 1/2"	51 1/2"	97 1/2"	48°
TL 1124 (1/2" OFFSET IDLER)	1900-0240	46 7/8"	9 3/4"	16 1/2"	51"	57 1/2"	1 3/8"	19"	38 3/4"	51 1/8"	97 3/4"	49°
TL 1124-2524	1900-0137	46"	11"	16 1/8"	50 1/8"	58 1/4"	2 1/2"	22 1/4"	43"	49 3/8"	96 1/2"	52°
TL 1124-2524 **	1901-0022											
TL 2224-2524 **	1900-0139											
TL 1124-2524 (TOP HOLES)	1900-0178	49 1/2"	11"	16 1/8"	53 5/8"	62 1/4"	3 1/8"	20 1/8"	40 3/4"	55 5/8"	102 3/4"	52°
TL 2224-2524 (TOP HOLES) **	1900-0179											
TL 1124-2526	1900-0162	46"	13"	16 1/8"	50 1/2"	58 3/4"	3"	23 3/8"	45 1/8"	48 3/8"	96 1/8"	55°
TL 1124-2526 **	1900-0037											
TL 2224-2526 **	1900-0041											
TL 1124-2526 (TOP HOLES)	1900-0184	49 1/2"	13"	16 1/8"	54"	62 5/8"	3 3/8"	21 3/8"	43 1/8"	54 3/4"	102 3/8"	55°
TL 2224-2526 (TOP HOLES) **	1900-0185											

CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BAYNE MACHINE WORKS, INC. AND IS RECALLABLE AT ANY TIME. IT MUST NOT BE COPIED OR USED DETRIMENTALLY TO THE INTEREST OF BAYNE MACHINE WORKS, INC.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
 LINEAR TOLERANCES:
 FRACTIONAL ±1/32
 TWO PLACE DECIMAL ±.015
 THREE PLACE DECIMAL ±.005
 ANGULAR TOLERANCES:
 MACHINED ±.025 DEG
 BEND ±1.00 DEG

BAYNE MACHINE WORKS, INC.
 910 FORK SHOALS ROAD - GREENVILLE, SC 29605 - 864.288.3877

TITLE
TL SERIES SPECIFICATIONS

MATERIAL		DRAWN BY CTT	DATE 10/22/2009	SCALE NONE	SHEET 3	OF 4
QTY	FINISH	WEIGHT	CHECKED BY	DATE	DWG NO H3000027	REV -

MODEL NUMBER	PART #	"A" DIM.	"B" DIM.	"C" DIM.	"D" DIM.	"E" DIM.	"F" DIM.	"G" DIM.	"H" DIM.	"J" DIM.	"K" DIM.	"L" DIM.
TL 1128 **	1900-0186	50"	7"	16 1/8"	54 5/8"	65 3/8"	2"	20 3/8"	38"	60 3/8"	105 3/8"	44°
TL 2228 **	1900-0027											
TL 1128 (TOP HOLES) **	1900-0187	53 1/2"	7"	16 1/8"	58 1/8"	69 5/8"	2 1/8"	17 7/8"	35 1/2"	66 1/4"	111 3/8"	44°
TL 2228 (TOP HOLES) **	1900-0261											
TL 2228-2524 **	1900-0121	50"	11"	16 1/8"	55 1/4"	66 1/8"	2 5/8"	22 7/8"	42 3/4"	58 1/8"	104 7/8"	50°
TL 1128-2524 (MID HOLES) **	1900-0274	51 3/4"	11"	16 1/8"	57"	68 1/4"	2 1/2"	21 3/4"	41 5/8"	61 1/4"	107 7/8"	50°
TL 2228-2524 (MID HOLES) **	1900-0275											
TL 2228-2524 (TOP HOLES) **	1900-0188	53 1/2"	11"	16 1/8"	58 3/4"	70 1/8"	3 1/8"	20 5/8"	40 1/2"	64 3/8"	111"	50°
TL 2228-2526 **	1900-0043	50 1/4"	13 7/8"	16 1/4"	56 3/8"	67 1/4"	3"	24 5/8"	44 7/8"	58"	104 7/8"	51°
TL 2228-2526 (TOP HOLES) **	1900-0189	53 3/4"	13 3/4"	16 1/4"	59 7/8"	71 1/4"	3 5/8"	22 3/8"	42 5/8"	64 1/4"	111 1/8"	51°
TL 1132 **	1900-0277	54"	7"	16 1/8"	60 5/8"	73 1/4"	2"	20 1/2"	37 7/8"	68 3/4"	113 1/2"	43°
TL 2232 **	1900-0029											
TL 1132 (TOP HOLES) **	1900-0278	57 1/2"	7"	16 1/8"	64 1/8"	77 1/2"	2 1/8"	18 1/8"	35 1/4"	74 5/8"	119 3/8"	43°
TL 2232 (TOP HOLES) **	1900-0263											
TL 2232-2524 **	1900-0116	54"	11"	16 1/8"	60 3/8"	73 7/8"	2 5/8"	23 3/8"	42 5/8"	66 3/4"	113"	48°
TL 2232-2524 (TOP HOLES) **	1900-0270	57 1/2"	11"	16 1/8"	63 7/8"	78"	3 1/8"	21"	40 1/4"	72 7/8"	119 1/8"	48°
TL 2232-2526 **	1900-0045	54"	13"	16 1/8"	60 5/8"	74 3/8"	2 7/8"	24 5/8"	44 7/8"	65 7/8"	112 3/4"	51°
TL 2232-2526 (TOP HOLES) **	1900-0271	57 1/2"	13"	16 1/8"	64 1/8"	78 1/2"	3 1/2"	22 1/2"	42 5/8"	72 1/8"	118 7/8"	51°
TL 1134 **	1900-0279	56"	7"	16 1/8"	63 1/8"	77 1/8"	2 1/8"	20 5/8"	37 3/4"	72 7/8"	117 1/2"	43°
TL 2234 **	1900-0031											
TL 2234 (TOP HOLES) **	1900-0265	59 1/2"	7"	16 1/8"	66 5/8"	81 3/8"	2 1/8"	18"	35 1/4"	78 3/4"	123 3/8"	43°
TL 2234-2524 **	1900-0140	56"	11"	16 1/8"	62 7/8"	77 3/4"	2 5/8"	23 1/2"	42 1/2"	71"	117 1/8"	48°
TL 2234-2524 (TOP HOLES) **	1900-0272	59 1/2"	11"	16 1/8"	66 3/8"	81 7/8"	3"	21 1/8"	40 1/8"	77 1/8"	123 1/8"	48°
TL 2234-2526 **	1900-0117	56 1/4"	13 7/8"	16 1/4"	64 1/8"	79"	2 7/8"	25 3/8"	44 5/8"	71"	117 1/4"	48°
TL 2234-2526 (TOP HOLES) **	1900-0273	59 3/4"	13 3/4"	16 1/4"	67 5/8"	83"	3 1/2"	23"	42 1/4"	77 1/8"	123 3/8"	48°

CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		BAYNE MACHINE WORKS, INC.	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BAYNE MACHINE WORKS, INC. AND IS RECALLABLE AT ANY TIME. IT MUST NOT BE COPIED OR USED DETRIMENTALLY TO THE INTEREST OF BAYNE MACHINE WORKS, INC.		LINEAR TOLERANCES: FRACTIONAL ±1/32 TWO PLACE DECIMAL ±.015 THREE PLACE DECIMAL ±.005		910 FORK SHOALS ROAD - GREENVILLE, SC 29605 - 864.288.3877	
		ANGULAR TOLERANCES: MACHINED ±.025 DEG BEND ±1.00 DEG		TITLE TL SERIES SPECIFICATIONS	
MATERIAL		DRAWN BY CTT	DATE 10/22/2009	SCALE NONE	SHEET OF 4 4
QTY	FINISH	WEIGHT	CHECKED BY	DATE	DWG NO H3000027
					REV -